

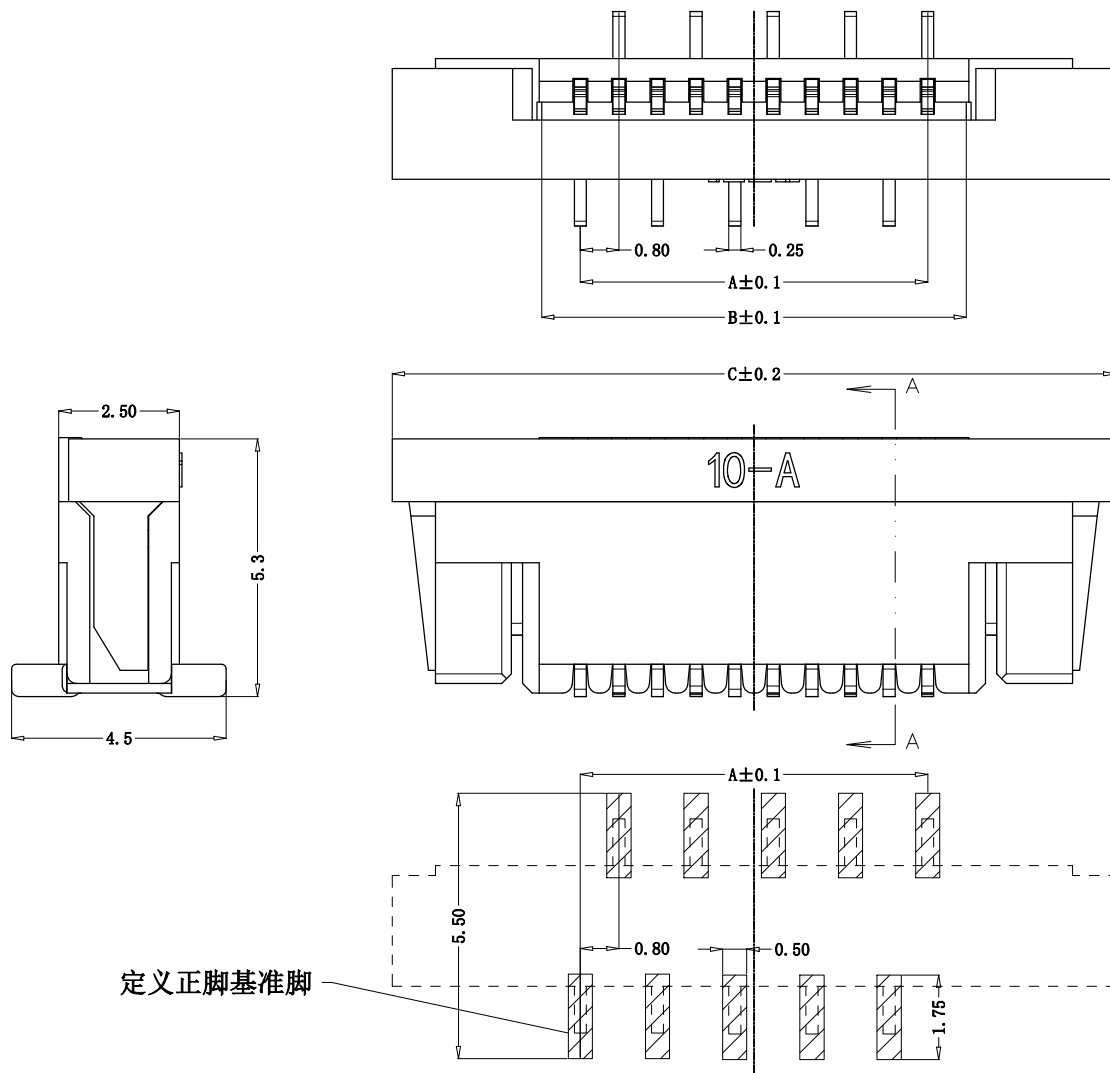



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

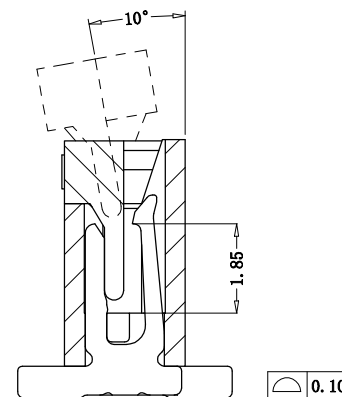

定义正脚基准脚

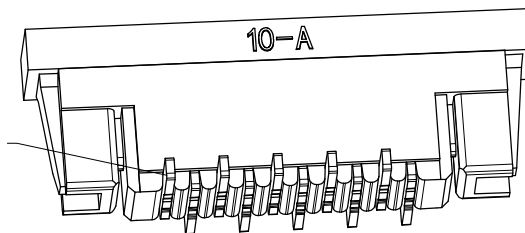

SECTION A-A

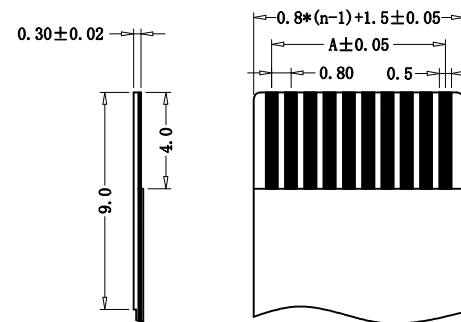

孔位	A	B	C
4	2.4	4	10.3
5	3.2	4.8	11.1
6	4	5.6	11.9
7	4.8	6.4	12.7
8	5.6	7.2	13.5
9	6.4	8	14.3
10	7.2	8.8	15.1
11	8	9.6	15.9
12	8.8	10.4	16.7
13	9.6	11.2	17.5
14	10.4	12	18.3
15	11.2	12.8	19.1
16	12	13.6	19.9
17	12.8	14.4	20.7
18	13.6	15.2	21.5
19	14.4	16	22.3
20	15.2	16.8	23.1
21	16	17.6	23.9
22	16.8	18.4	24.7
23	17.6	19.2	25.5
24	18.4	20	26.3
25	19.2	20.8	27.1
26	20	21.6	27.9
27	20.8	22.4	28.7
28	21.6	23.2	29.5
29	22.4	24	30.3
30	23.2	24.8	31.1
31	24	25.6	31.9
32	24.8	26.4	32.7
33	25.6	27.2	33.5
34	26.4	28	34.3
35	27.2	28.8	35.1

技术要求(Technical Index):

PCB LAYOUT

- 材质与表面处理(Material And Finish):
基座(Housing)和 盖子(Cover): LCP UL94V-0 Nature Or Black;
端子(Terminal): Phosphor Copper Au/Sn Plated;
焊片(Solder): Copper Alloy Au/Sn Plated;
- 工作温度(Temperature range): -25° C~+85° C.
- 额定电压(Rated voltage): 50V, AC/DC.
- 额定电流: 0.5A, AC/DC.
- 接触电阻(Contact resistance): ≤20mΩ.
- 绝缘电阻(Insulation resistance): ≥800MΩ.
- 耐电压(Withstanding Voltage): 500V AC/minute.

PROPER CABLE (SCALE 2:1)

DESIGN:	Xiping Huang	QWYCONN®深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.			
CHECK:	Ke Tian	TITLE: 0.8立贴(错位正脚)无焊片			
APPROVED:	Youquan Xu	PART NO. 0.8K-GL-nPB			
DIM	TOL	DIM	TOL	REV. A	SCALE: N/A
X.	±0.25	X°.	±3.0°	UNIT: mm	SHEET: 1/1
X. X	±0.20	X. X°			
X. XX	±0.15	X. XX°			
X. XXX		X. XXX°			