

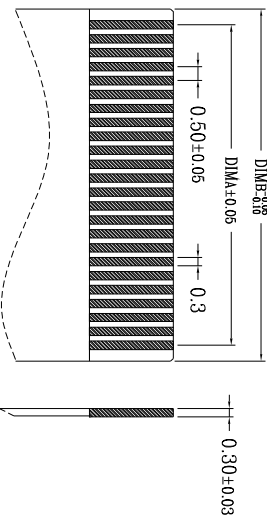
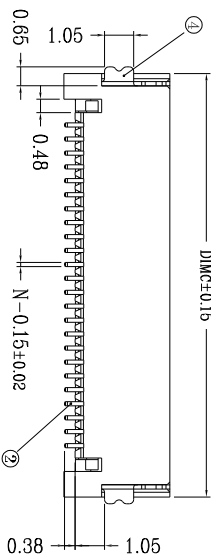
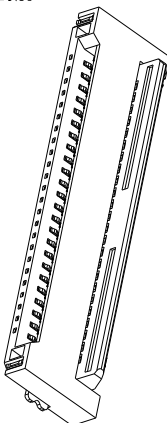




RoHS

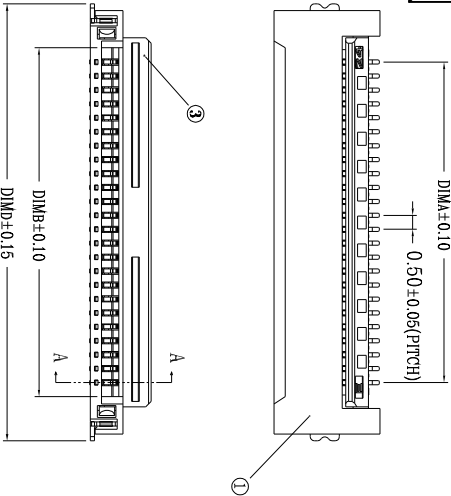

适用线路板

适用扁平线

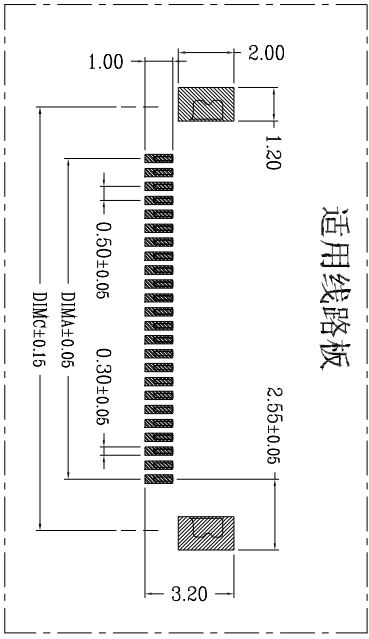

- 技术指标:
1. 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象.
 2. 温度范围: -25° C~85° C.
 3. 额定电压: 50V, AC/DC(等效).
 4. 接触电阻: ≤0.03Ω.
 5. 绝缘电阻: ≥500MΩ

QWYCONY®

深圳市启威源电子有限公司

SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.

GENERAL TOLERANCE

UNIT: mm

DATE:

ITEM: 0.5 Pitch后压阴式2代(=1.2)

TITLE:

.X	±0.5	X.°	±2°
.XX	±0.2	X.°	±1°
.XXX	±0.05	.XX°	±0.5°

CHECK: Jemply

DATE:

PART NO:0512-GX-nPWB

DRAWING NUMBER:

ANGLE PROJECTION



SIZE: A4

APPROVE:Yong Xing

DATE:

1

2

3

4

5

6

7

8

1

2

3

4

5

6

7

8

EDITION
A0

SUMMARY OF CHANGES
新版发行

ISSUE DATE