

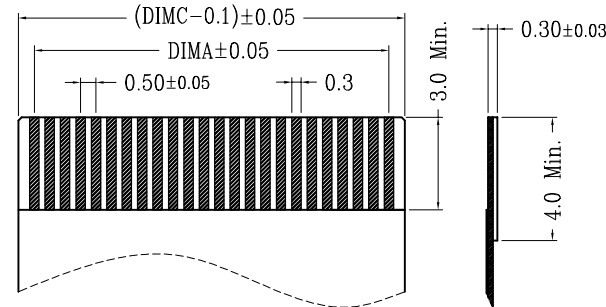

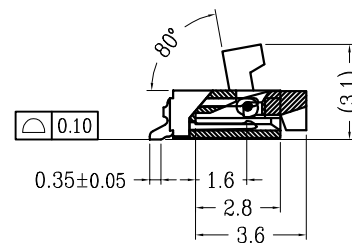

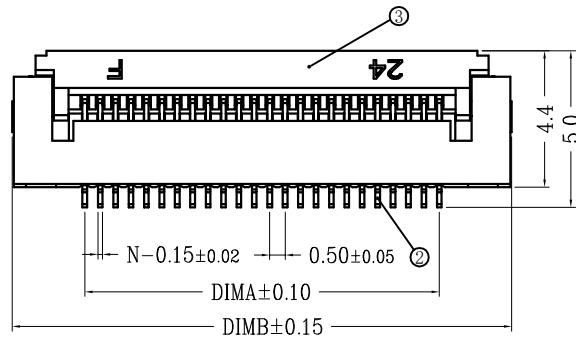
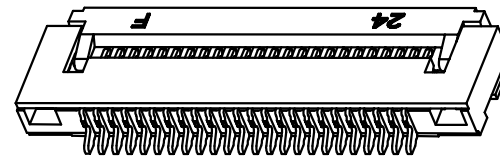


D		E	F		
版次	变更摘要	日期	序号	品名	材质
0	新产品发行	2015/1/28	①	0.5掀盖胶芯 (H1.5)	LCP UL94V-0 本色
			②	0.5掀盖端子 (H1.5)	铜合金/表面镀锡 镀金
			③	0.5掀盖后盖 (H1.5)	LCP UL94V-0 黑色
			④	0.5掀盖焊片 (H1.5)	铜合金/表面镀锡

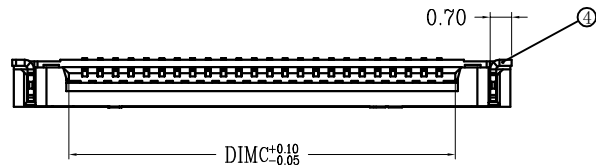

适用扁平线(Applicable Flat Cable)


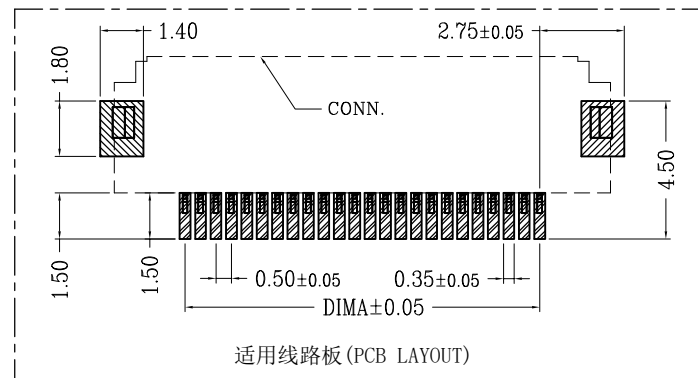


一般公差 (TOLERANCE)
X ±0.50 .XX ±1.0
X ±0.20 .XXX ±0.5
ANGLES ±1°

CKT	DIMA	DIMB	DIMC	CKT	DIMA	DIMB	DIMC
4	1.50	6.20	2.53	33	16.00	20.70	17.03
5	2.00	6.70	3.03	34	16.50	21.20	17.53
6	2.50	7.20	3.53	35	17.00	21.70	18.03
7	3.00	7.70	4.03	36	17.50	22.20	18.53
8	3.50	8.20	4.53	37	18.00	22.70	19.03
9	4.00	8.70	5.03	38	18.50	23.20	19.53
10	4.50	9.20	5.53	39	19.00	23.70	20.03
11	5.00	9.70	6.03	40	19.50	24.20	20.53
12	5.50	10.20	6.53	41	20.00	24.70	21.03
13	6.00	10.70	7.03	42	20.50	25.20	21.53
14	6.50	11.20	7.53	43	21.00	25.70	22.03
15	7.00	11.70	8.03	44	21.50	26.20	22.53
16	7.50	12.20	8.53	45	22.00	26.70	23.03
17	8.00	12.70	9.03	46	22.50	27.20	23.53
18	8.50	13.20	9.53	47	23.00	27.70	24.03
19	9.00	13.70	10.03	48	23.50	28.20	24.53
20	9.50	14.20	10.53	49	24.00	28.70	25.03
21	10.00	14.70	11.03	50	24.50	29.20	25.53
22	10.50	15.20	11.53	51	25.00	29.70	26.03
23	11.00	15.70	12.03	52	25.50	30.20	26.53
24	11.50	16.20	12.53	53	26.00	30.70	27.03
25	12.00	16.70	13.03	54	26.50	31.20	27.53
26	12.50	17.20	13.53	55	27.00	31.70	28.03
27	13.00	17.70	14.03	56	27.50	32.20	28.53
28	13.50	18.20	14.53	57	28.00	32.70	29.03
29	14.00	18.70	15.03	58	28.50	33.20	29.53
30	14.50	19.20	15.53	59	29.00	33.70	30.03
31	15.00	19.70	16.03	60	29.50	34.20	30.53
32	15.50	20.20	16.53				

深圳市启崴源电子有限公司

品名 (TITLE)	0.5翻盖下接H1.5	制图 (DR)	
料号 (DWG.NO)	0515-nCL-SN	校对 (CHKD)	
比例 (SCALE)	1:1	审核 (APPD)	
单位 (UNITS)	mm	张数 (SHEET)	1 OF 1
		SIZE	A4
		REV	A

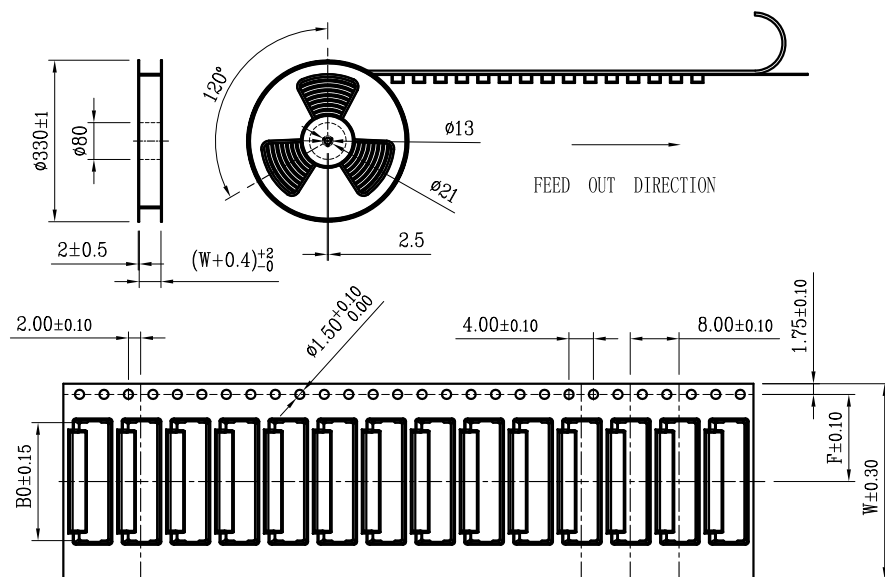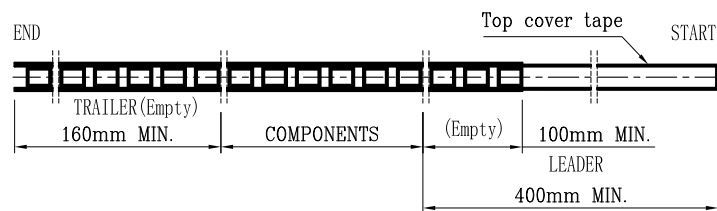

4	CKT	W	PCS/RELL	RELL/CARTON	SUM(PCS)
	(0.5mm pitch)				
	4	16	4000	14	56000
	5		4000	14	56000
	6		4000	14	56000
	7		4000	14	56000
	8		4000	14	56000
	9		4000	14	56000
	10		4000	14	56000
	11	24	4000	10	40000
	12		4000	10	40000
	13		4000	10	40000
14	4000		10	40000	
15	4000		10	40000	
16	4000		10	40000	
17	4000		10	40000	
18	4000		10	40000	
19	4000		10	40000	
20	4000		10	40000	
5	21		4000	10	40000
	22		4000	10	40000
	23		4000	10	40000
	24		4000	10	40000

NOTE (注) :

1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.

(10片孔距累积公差 $\pm 0.2\text{mm}$.)

2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.

(載帶拱/弧形MAX:1/100mm.)

3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.

(所有的尺寸要满足协会EIA-481规范.)

4. MATERIAL:BLACK ANTISTATIC PS.

(载带材料: 黑色抗静电PS.)


5. THICKNESS: 0.30 ± 0.05 mm. (載帶厚度: 0.30 ± 0.05 mm.)

6. PACKING LENGHT PER REEL: 33 METERS. (每卷包装长度: 33米.)

7. COMPONENT LOAD PER REEL: 4000 PCS. (每卷包装数量: 4000只.)

8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及保尼龙填充。

9. 纸箱分小、中、标准型3种规格型号：装箱为整箱(左下包装量)采用标准型纸箱包装，未达到整箱数量以产品量适当采用小型或中型纸箱包装。

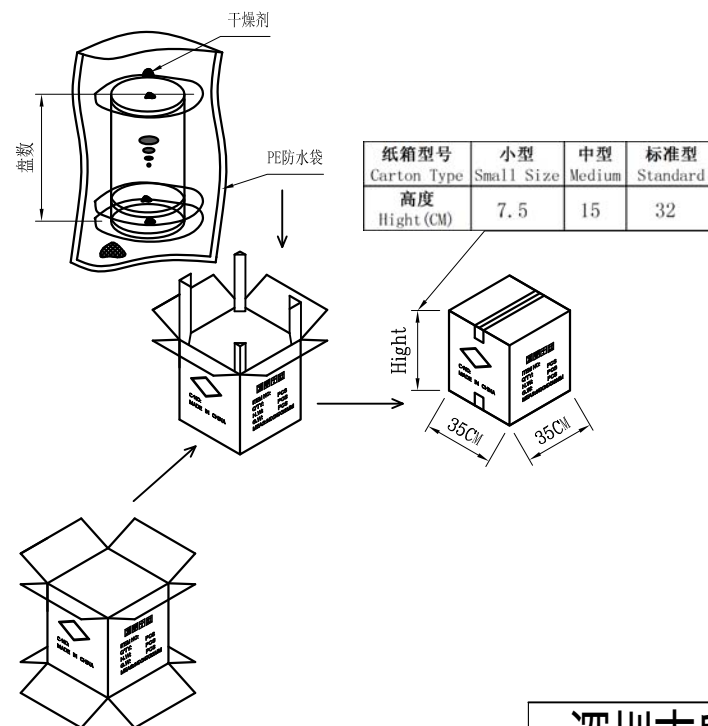


CKT (0.5mm pitch)	BO	W	F
4	6.30	16	7.5
5	6.80		
6	7.30		
7	7.80		
8	8.30		
9	8.80		
10	9.30		
11	9.80	24	11.5
12	10.30		
13	10.80		
14	11.30		
15	11.80		
16	12.30		
17	12.80		
18	13.30		
19	13.80		
20	14.30		
21	14.80		
22	15.30		
23	15.80		
24	16.30		

深圳市启崑源电子有限公司


品名 (TITLE)	0.5翻盖下接H1.5		制图 (DR)
料号 (DWG.NO)	0515-nCL-SN		校对 (CHKD)
比例 (SCALE)	单位 (UNITS)		张数 (SHEET)
----	mm		1 OF 2
			SIZE A4
			REVISION

一般公差 (TOLERANCE)

X. $\pm .50$ XX $\pm .15$
 .X $\pm .25$.XXX $\pm .10$
 ANGLES $\pm 2^\circ$

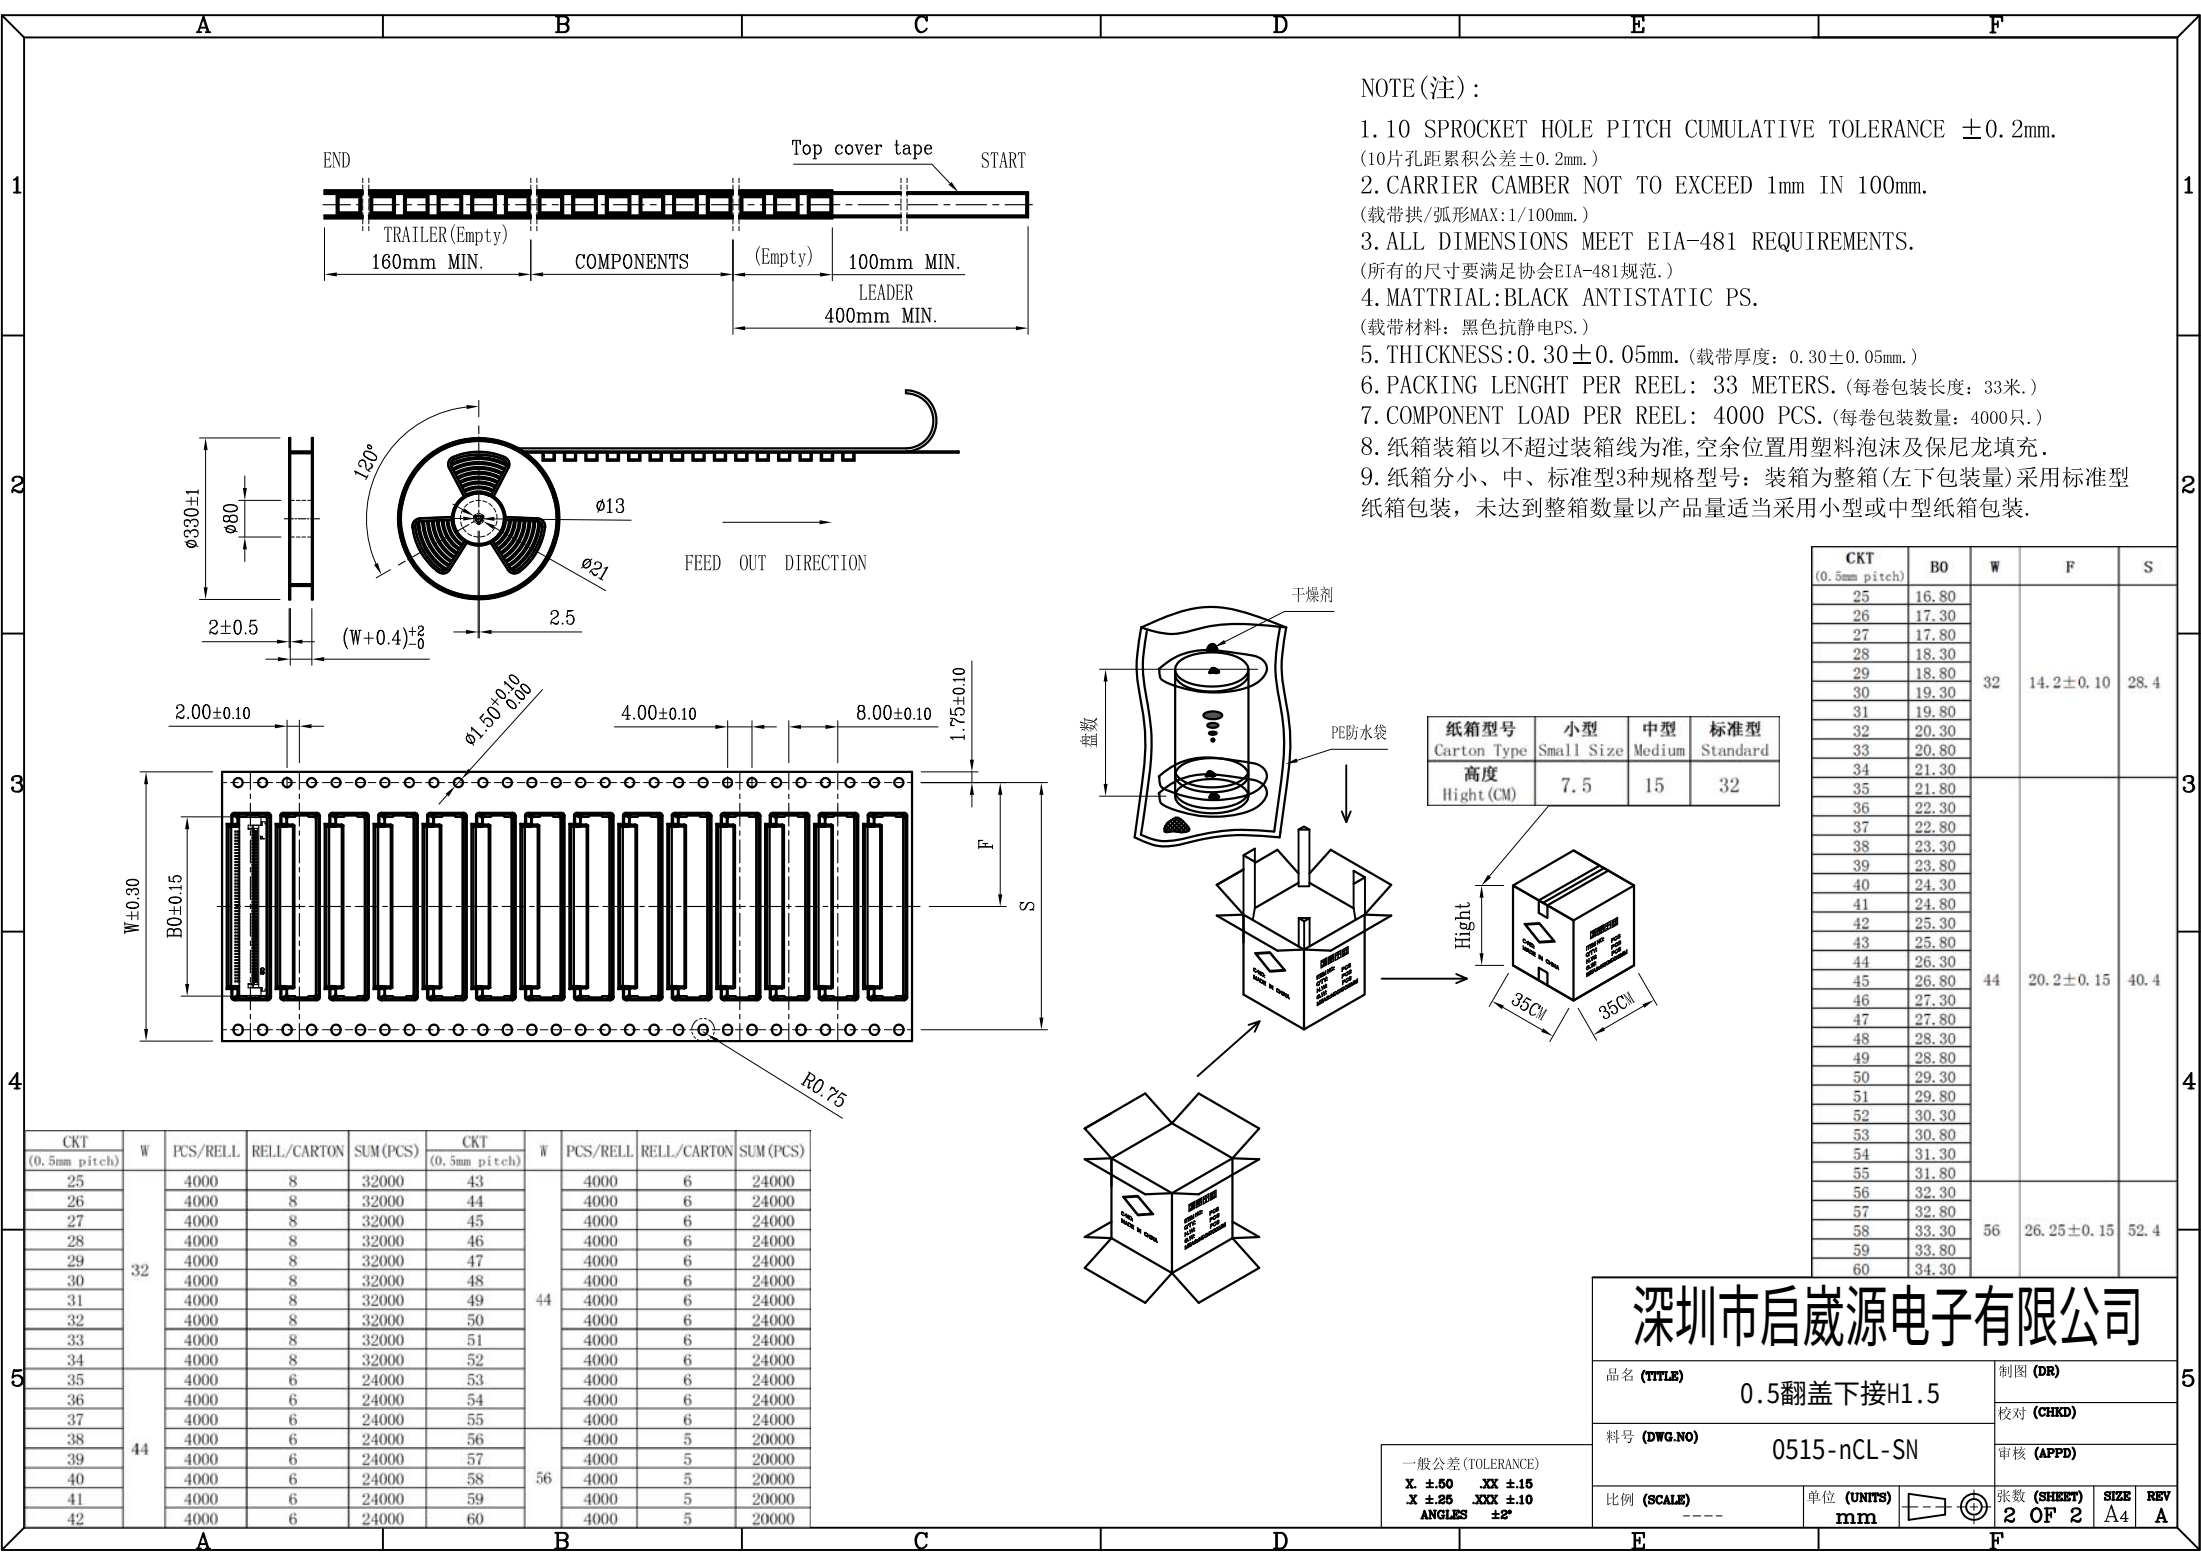

- NOTE(注):
- 1.10 SPROCKET HOLE PITCH CUMULATIVE TOLERANCE $\pm 0.2\text{mm}$.
(10片孔距累积公差 $\pm 0.2\text{mm}$.)
 2. CARRIER CAMBER NOT TO EXCEED 1mm IN 100mm.
(载带拱/弧形MAX:1/100mm.)
 3. ALL DIMENSIONS MEET EIA-481 REQUIREMENTS.
(所有的尺寸要满足协会EIA-481规范.)
 4. MATERIAL: BLACK ANTISTATIC PS.
(载带材料: 黑色防静电PS.)
 5. THICKNESS: $0.30 \pm 0.05\text{mm}$. (载带厚度: $0.30 \pm 0.05\text{mm}$.)
 6. PACKING LENGTH PER REEL: 33 METERS. (每卷包装长度: 33米.)
 7. COMPONENT LOAD PER REEL: 4000 PCS. (每卷包装数量: 4000只.)
 8. 纸箱装箱以不超过装箱线为准, 空余位置用塑料泡沫及聚乙烯填充.
 9. 纸箱分小、中、标准型3种规格型号: 装箱为整箱(左下包装量)采用标准型纸箱包装, 未达到整箱数量以产品量适当采用小型或中型纸箱包装.

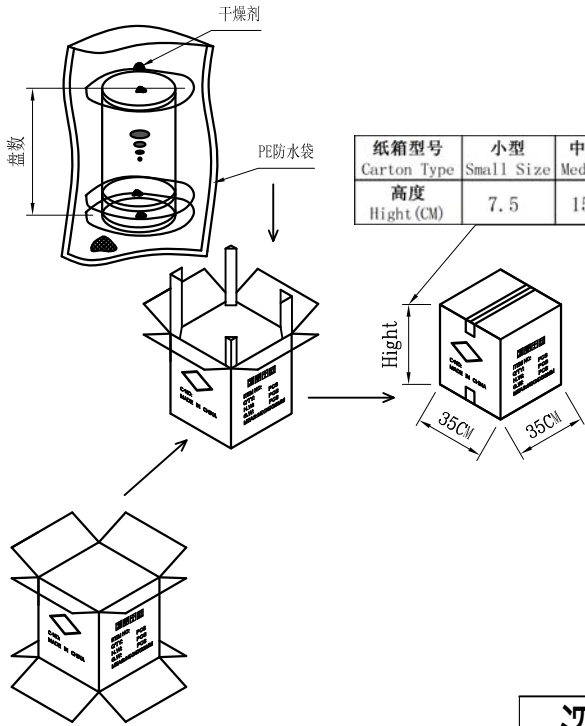

CKT (0.5mm pitch)	BO	W	F	S
25	16.80	32	14.2±0.10	28.4
26	17.30			
27	17.80			
28	18.30			
29	18.80			
30	19.30			
31	19.80			
32	20.30			
33	20.80			
34	21.30			
35	21.80	44	20.2±0.15	40.4
36	22.30			
37	22.80			
38	23.30			
39	23.80			
40	24.30			
41	24.80			
42	25.30			
43	25.80			
44	26.30			
45	26.80	56	26.25±0.15	52.4
46	27.30			
47	27.80			
48	28.30			
49	28.80			
50	29.30			
51	29.80			
52	30.30			
53	30.80			
54	31.30			
55	31.80			
56	32.30			
57	32.80			
58	33.30			
59	33.80			
60	34.30			

CKT (0.5mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)	CKT (0.5mm pitch)	W	PCS/REEL	REEL/CARTON	SUM (PCS)
25	32	4000	8	32000	43	44	4000	6	24000
26		4000	8	32000	44		4000	6	24000
27		4000	8	32000	45		4000	6	24000
28		4000	8	32000	46		4000	6	24000
29		4000	8	32000	47		4000	6	24000
30		4000	8	32000	48		4000	6	24000
31		4000	8	32000	49		4000	6	24000
32		4000	8	32000	50		4000	6	24000
33		4000	8	32000	51		4000	6	24000
34		4000	8	32000	52		4000	6	24000
35	44	4000	6	24000	53	56	4000	5	20000
36		4000	6	24000	54		4000	5	20000
37		4000	6	24000	55		4000	5	20000
38		4000	6	24000	56		4000	5	20000
39		4000	6	24000	57		4000	5	20000
40		4000	6	24000	58		4000	5	20000
41		4000	6	24000	59		4000	5	20000
42		4000	6	24000	60		4000	5	20000

一般公差 (TOLERANCE)
X ± 0.50 XX ± 15
X ± 0.25 XXX ± 10
ANGLES $\pm 2^\circ$

深圳市启崴源电子有限公司

品名 (TITLE)	0.5翻盖下接H1.5	制图 (DR)
料号 (DWG.NO)	0515-nCL-SN	校对 (CHKD)
比例 (SCALE)	---	审核 (APPD)
单位 (UNITS)	mm	张数 (SHEET)
		2 OF 2
		SIZE A4
		REV A