


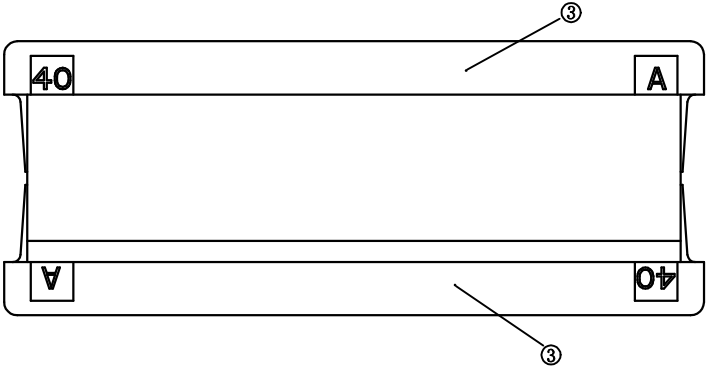

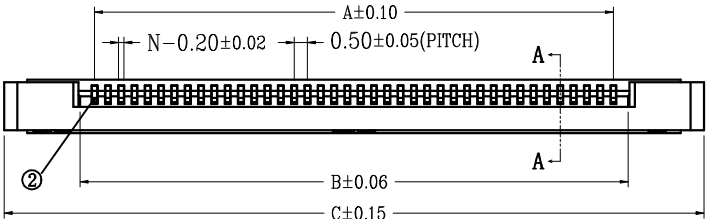
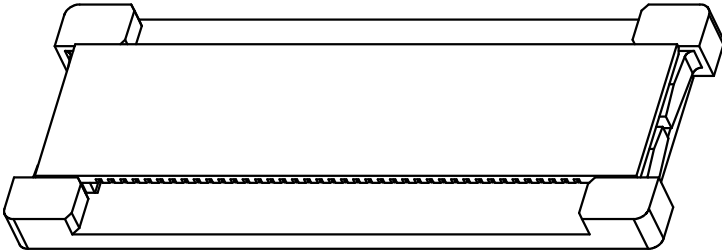
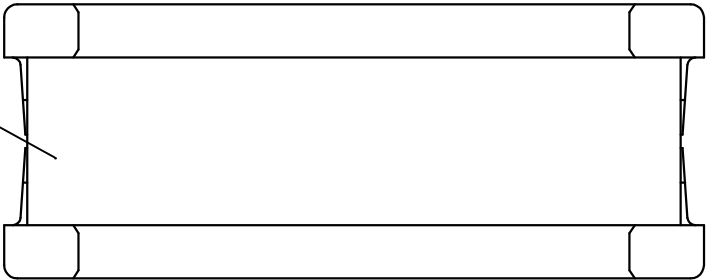



REV.	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

序号 (NO.)	品名 (Name)	材质 (Material)
①	0.5双面拉拔胶芯(H=2.0) 0.5 Pitch ZIF Double-side Type Housing (H=2.0)	LCP UL94V-0 本色 Natural
②	0.5双面拉拔端子(H=2.0) 0.5 Pitch ZIF Double-side Type Terminal (H=2.0)	磷青铜/表面镀锡 Phosphor Bronze/ Tin Plating
③	0.5双面拉拔后盖(H=2.0) 0.5 Pitch ZIF Double-side Type Actuator (H=2.0)	LCP UL94V-0 黑色 Black

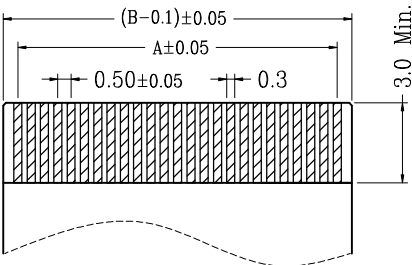

SECTION A-A

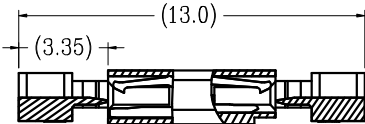

技术指标(Technical Index):

- 塑件表面应光洁、无毛边、无明显收缩、缺陷、裂纹等现象
(The surface of the plastic parts should be smooth, no rough edges, no obvious shrinkage, defects, cracks and other phenomena)
- 温度范围(Temperature range): -25° C~85° C.
- 额定电压(Rated voltage): 50V, AC/DC(等效).
- 接触电阻(Contact resistance): ≤0.03Ω.
- 绝缘电阻(Insulation resistance): ≥500MΩ

适用扁平线(Applicable Flat Cable)

DESIGN:	Xiping Huang	QWYCONN®深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.			
CHECK:	Ke Tian	TITLE:			
APPROVED:	Youquan Xu	0.5转接板H2.0			
DIM	TOL	DIM	TOL	PART NO.	
X.	±0.25	X°	±3.0°	0.5K-ZJ-NPWB	
X.X	±0.20	X.X°		REV. A	
X.XX	±0.15	X.XX°		SCALE: N/A	
X.XXX		X.XXX°		UNIT: mm	
				SHEET: 1/1	
				⊕ ⊞	