
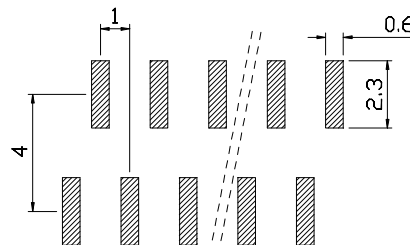
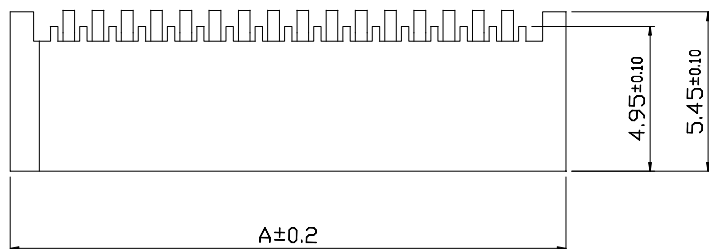



REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

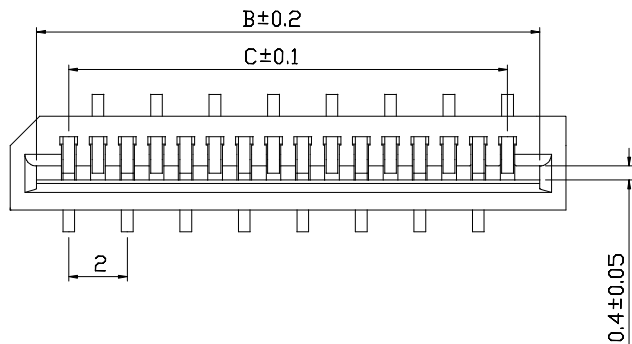

安装尺寸

2	接触件	C+1	磷锡铜
1	塑胶本体	1	LCP-E130
序号		数量	

孔位	A	B	C	孔位	A	B	C
4	7.5	5.15	3	23	26.5	24.15	22
5	8.5	6.15	4	24	27.5	25.15	23
6	9.5	7.15	5	25	28.5	26.15	24
7	10.5	8.15	6	26	29.5	27.15	25
8	11.5	9.15	7	27	30.5	28.15	26
9	12.5	10.15	8	28	31.5	29.15	27
10	13.5	11.15	9	29	32.5	30.15	28
11	14.5	12.15	10	30	33.5	31.15	29
12	15.5	13.15	11	31	34.5	32.15	30
13	16.5	14.15	12	32	35.5	33.15	31
14	17.5	15.15	13	33	36.5	34.15	32
15	18.5	16.15	14	34	37.5	35.15	33
16	19.5	17.15	15	35	38.5	36.15	34
17	20.5	18.15	16	36	39.5	37.15	35
18	21.5	19.15	17	37	40.5	38.15	36
19	22.5	20.15	18	38	41.5	39.15	37
20	23.5	21.15	19	39	42.5	40.15	38
21	24.5	22.15	20	40	43.5	41.15	39
22	25.5	23.15	21				

技术要求:
每板间距: 1.0mm
额定电压: 50V/250V AC、DC
额定电流: 0.5A
绝缘电阻: 50MΩ MIN
接触电阻: 30mΩ MAX
工作温度: -20℃+85℃
线性尺寸的一般公差按±0.2

DESIGN:	Xiping Huang	QWYCONN®深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.			
CHECK:	Ke Tian	TITLE: 1.0单面接立贴			
APPROVED:	Youquan Xu	PART NO. 1.0-A-NPLT			
DIM	TOL	DIM	TOL	REV. A	SCALE: N/A
X.	±0.25	X°	±3.0°	UNIT: mm	SHEET: 1/1
X. X	±0.20	X. X°			
X. XX	±0.15	X. XX°			
X. XXX		X. XXX°			