
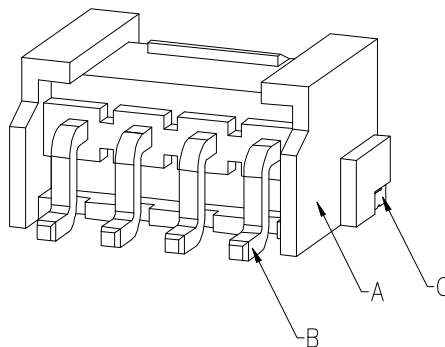
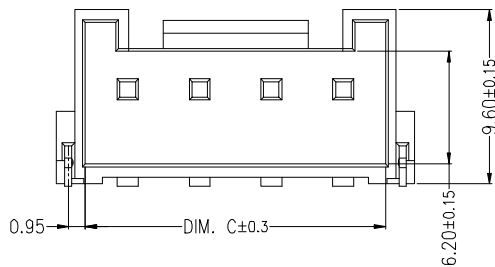
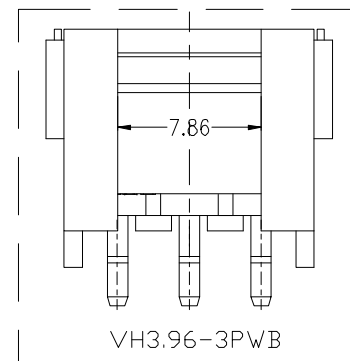
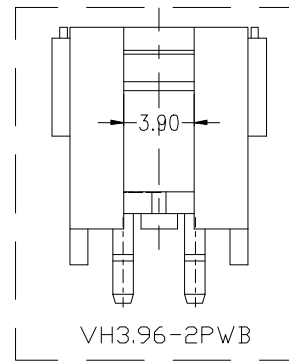
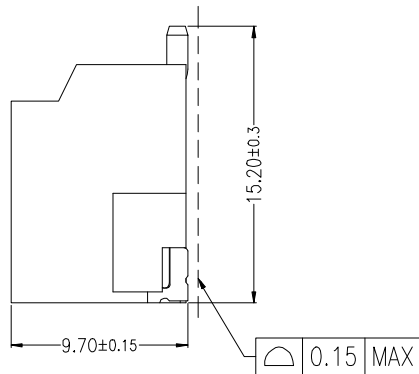



REV	ECN NO.	LOCAS.	DESCRIPTION	DATE	DESIGN
A			NEW DRAWING		

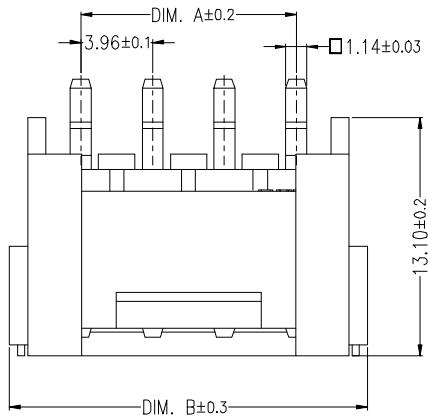

主要技术参数 Main Specifications

线 数 (Poles): 02 to 16
接触电阻 (Contact resistance): $\leq 20m\Omega$
绝缘电阻 (Insulation resistance): $\geq 1000M\Omega$
额定电压 (Rated voltage): 250V AC DC
额定电流 (Rated current): 7.0A AC DC
耐 电 压 (Withstand Voltage): 1500V AC/minute
温度范围 (Temperature Range): $-25^{\circ}C \sim +105^{\circ}C$

C	SOLDER TAB	2PCS	Brass	Sn-plated
B	CONTACT	02~10PCS	Brass	Sn-plated
A	PEDESTAL	1 PCS	PA9T	UL 94V-0, COLOR:BEIGE

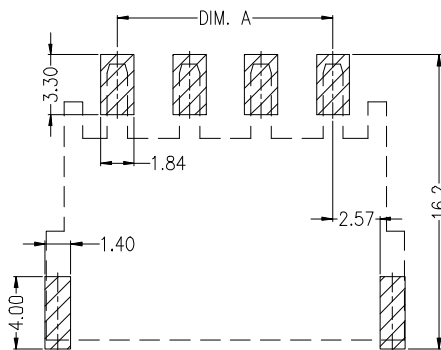

Mating PCB detail

Circuits	Dimensions (mm)		
	DIM. A	DIM. B	DIM. C
02	3.96	11.88	8.60
03	7.92	15.84	12.56
04	11.88	19.80	16.52
05	15.84	23.76	20.48
06	19.80	27.72	24.44
07	23.76	31.68	28.40
08	27.72	35.64	32.36
09	31.68	39.60	36.32
10	35.64	43.56	40.28

DESIGN:	Xiping Huang	QWYCONN®深圳市启崴源电子有限公司 SHENZHEN QIWEIYUAN ELECTRONIC CO., LTD.			
CHECK:	Ke Tian	TITLE: VH3.96贴片针座			
APPROVED:	Youquan Xu				
DIM	TOL	DIM	TOL	PART NO.	
X.	±0.25	X°.	±3.0°		
X. X	±0.20	X. X°		REV. A	
X. XX	±0.15	X. XX°			
X. XXX		X. XXX°			
		SCALE:	N/A	UNIT:	mm
		SHEET:	1/1		